

Gates Mectrol Food Belt Quote Checklist Z Conveyor


| | |
|---------------|----------------|
| Name: | Site Location: |
| Company Name: | |

Application

Briefly describe what is being conveyed, what type of belt is being replaced.

| |
|---|
| Max. Load _____ lbs. |
| Load Rate _____ lbs/hr Conveyor Speed _____ ft/min |
| Lb per Cubic Ft. _____ Depth of Product _____ in |

| Belt | Input |
|--|----------------------------------|
| Belt Type (FC9IPR, FC12, FC12IP, PC10, PC20, CC40, Dewatering) | |
| Belt Width (in/mm) | |
| Belt Length (in/mm) | |
| Splice Type | |
| Mechanical | PosiLace, APF, RS, UX1 |
| Weld | Finger Pattern or Straight Cut |
| Straight Cleats (5mm thick) | Yes or No |
| Height + | |
| Spacing | |
| Offset From Edge (in/mm) / Centered | |
| Scoop Cleats (7 mm thick) | Yes or No |
| Overall Height | 2.5", 3", 3.5", 4", 5", 6" |
| Spacing | |
| Offset From Edge (in/mm) / Centered | |
| Sidewalls | Yes or No |
| Height (in/mm) | 1.4" to 4.3" |
| Offset From Edge (in/mm) | |
| V-Guide | Yes or No |
| Type | K6, K8, K10, K13, A Modified |
| Offset From Edge (in/mm) / Centered | |
| Sprockets | |
| # of Sprockets | |
| Number of Teeth or Diameter | |
| Bore Type | Round or Square |
| Dimension (in/mm) | |
| Keyway Dimension (in/mm) | |
| Any Back Idlers | Yes or No |
| Diameter of Back Bend (in/mm) | |
| Smallest In Conveyor (in/mm) | |
| Drum Motor / Motorized Pulley | Yes or No |
| Conveyor | |
| Drive Type | Head or Tail |
| Bed Type Top | Wear Strip / Slider Bed / Roller |
| Carriway Material ** | |
| Bed Type Return | Wear Strip / Slider Bed / Roller |
| Carriway Material ** | |
| Conveyor Sidewalls/Fenders - Height | |
| Material * | |
| Incline Angle | |
| Angle of Belt Wrap On Drive Pulley | |
| Tensioning Device (Take Up) Avail. | Yes or No |
| Type | |
| Total Travel | |
| Extended Distance When Center Distance is Measured | |

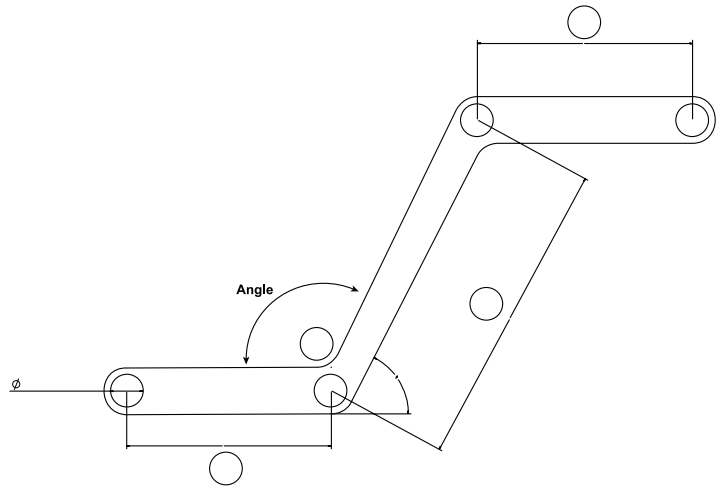

Comments

Additional Information

+ 0.25" 0.25", 0.5", 0.75", 1", 1.5", 2", 2.5", 3", 3.5", 4"
 * UHMW or Stainless Steel
 * Wet / Dry

GATES MECTROL, INC.

9 Northwestern Drive
 Salem, NH 03079, U.S.A.
 Tel. +1 (603) 890-1515
 Tel. +1 (800) 394-4844
 Fax +1 (603) 890-1616

www.gatesmectrol.com

Application Engineering

email: apps@gatesmectrol.com

Tel. +1 (800) 505-8494

GM_Food Belt_Quote Checklist_Z Conveyor 5-2017



Gates Mectrol Food Belt Quote Checklist **Straight Conveyor**


| | |
|---------------|----------------|
| Name: | Site Location: |
| Company Name: | |

Application

Briefly describe what is being conveyed, what type of belt is being replaced.

| | |
|------------------------|-----------------------------|
| Max. Load _____ lbs. | |
| Load Rate _____ lbs/hr | Conveyor Speed _____ ft/min |
| Lb per Cubic Ft. _____ | Depth of Product _____ in |

| Belt | Input |
|--|----------------------------------|
| Belt Type (FC9IPR, FC12, FC12IP, PC10, PC20, CC40, Dewatering) | |
| Belt Width (in/mm) | |
| Belt Length (in/mm) | |
| Splice Type | |
| Mechanical | PosiLace, APF, RS, UX1 |
| Weld | Finger Pattern or Straight Cut |
| Straight Cleats (5mm thick) | Yes or No |
| Height + | |
| Spacing | |
| Offset From Edge (in/mm) / Centered | |
| Scoop Cleats (7 mm thick) | Yes or No |
| Overall Height | 2.5", 3", 3.5", 4", 5", 6" |
| Spacing | |
| Offset From Edge (in/mm) / Centered | |
| Sidewalls | Yes or No |
| Height (in/mm) | 1.4" to 4.3" |
| Offset From Edge (in/mm) | |
| V-Guide | Yes or No |
| Type | K6, K8, K10, K13, A Modified |
| Offset From Edge (in/mm) / Centered | |
| Sprockets | |
| # of Sprockets | |
| Number of Teeth or Diameter | |
| Bore Type | Round or Square |
| Dimension (in/mm) | |
| Keyway Dimension (in/mm) | |
| Any Back Idlers | Yes or No |
| Diameter of Back Bend (in/mm) | |
| Smallest In Conveyor (in/mm) | |
| Drum Motor / Motorized Pulley | Yes or No |
| Conveyor | |
| Bed Type | Wear Strip / Slider Bed / Roller |
| Wear Strips | |
| Number Across Conveyor Width | |
| Spacing | |
| Pattern | Parallel or Chevron |
| Material | UHMW or Stainless Steel |
| Slider Bed | |
| Dimensions (in/mm) | |
| Material | UHMW or Stainless Steel |
| Roller | |
| Number of Rollers | |
| Spacing of Rollers | |
| Returnway | Wear Strip / Slider Bed / Roller |
| Conveyor Sidewalls/Fenders - Height | |
| Material | UHMW or Stainless Steel |
| Troughing | Yes or No |
| Transition Length (in/mm) | |
| Angle | |
| Side Wear Strips | Yes or No |
| Drive Type | Head / Tail / Center |
| Incline Angle | |
| Angle of Belt Wrap On Drive Pulley | |
| Tensioning Device (Take Up) Avail. | Yes or No |
| Type | |
| Total Travel | |
| Extended Distance When Center Distance Is Measured | |

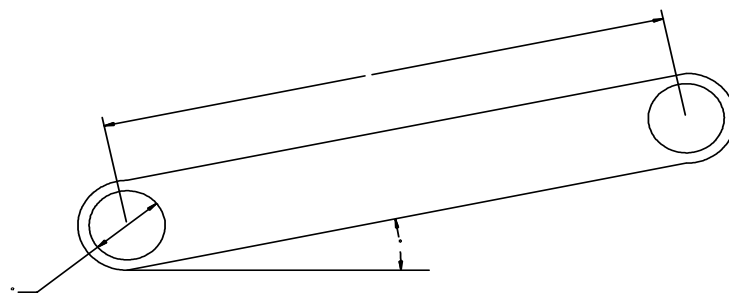

Comments

Additional Information

+ 0.25" 0.25", 0.5", 0.75", 1", 1.5", 2", 2.5", 3", 3.5", 4"

GATES MECTROL, INC.

9 Northwestern Drive
Salem, NH 03079, U.S.A.
Tel. +1 (603) 890-1515
Tel. +1 (800) 394-4844
Fax +1 (603) 890-1616

www.gatesmectrol.com

Application Engineering

email: apps@gatesmectrol.com

Tel. +1 (800) 505-8494



GM_Food Belt_Quote Checklist_Straight Conveyor 5-2017